



SIZE :

70x70x25mm (2.76"x2.76"x0.98")

CONSTRUCTION :

Glass fiber reinforced plastic:

Impeller and housing PBT are UL 94V-0 rating

OPERATING TEMPERATURE :

Ball bearing - 30°C to +75°C

Sleeve bearing - 10°C to +70°C

INSULATION RESISTANCE :

10meg Ohm min., at 500 VDC

(between frame and terminal)

DIELECTRIC STRENGTH :

5mA max., at 500 VAC 60Hz one minute

(between frame and terminal)

FUNCTION :

auto-restart option

frequency generator or rotation detection signal option



WEIGHT :

85 grams

Specifications

Specifications are subject to change without notice

MODEL NO.	BEARING	RATED VOLTAGE	OPERATING VOLTAGE RANGE	RATED CURRENT	RATED INPUT POWER	SPEED R.P.M.	MAX. AIR FLOW		MAX. AIR PRESSURE		NOISE dB-A
		VDC	V	A	W		m ³ /min	CFM	mmH ₂ O	IN H ₂ O	
BP702512M	Ball	12	10.2-13.8	0.33	3.96	5000	1.3	45.3	9.9	0.4	42.7
SP702512M	Sleeve										
BP702512H	Ball	12	10.2-13.8	0.52	6.24	5500	1.4	49.4	11.5	0.5	45.4
SP702512H	Sleeve										
BP702512HH	Ball	12	10.2-13.8	0.62	7.44	6000	1.5	54.0	14.0	0.6	47.5
SP702512HH	Sleeve										

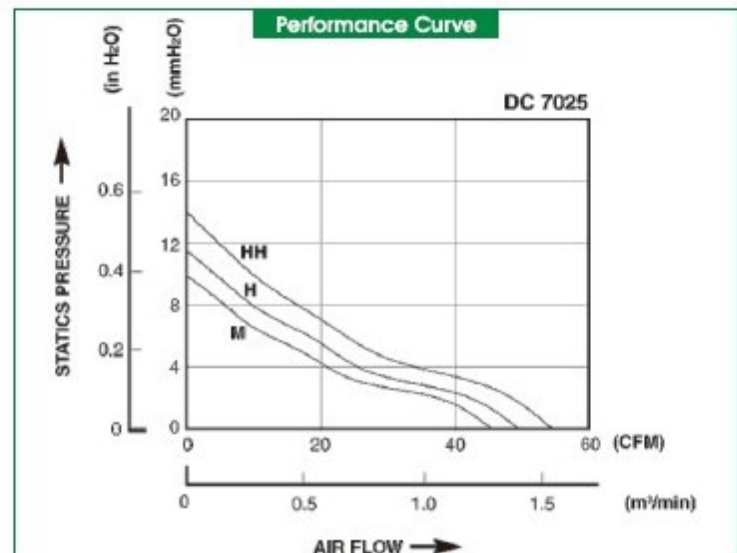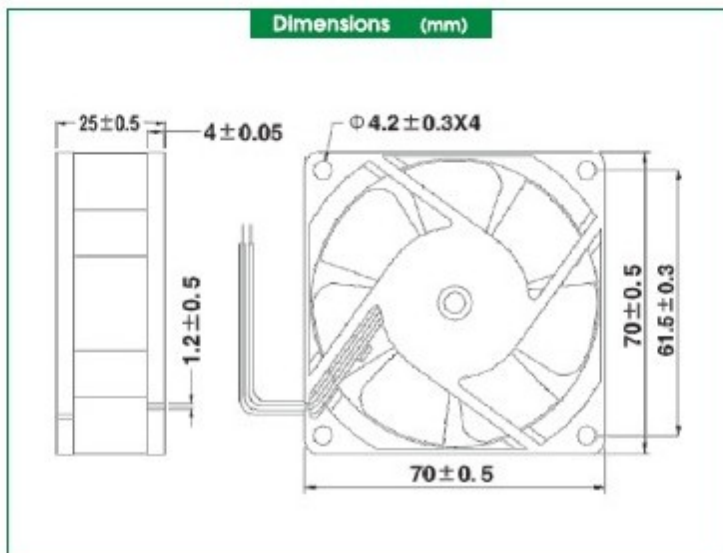

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Bi-Sonic:](#)

[SP702512M](#) [SP702512H](#) [SP702512HH](#)